
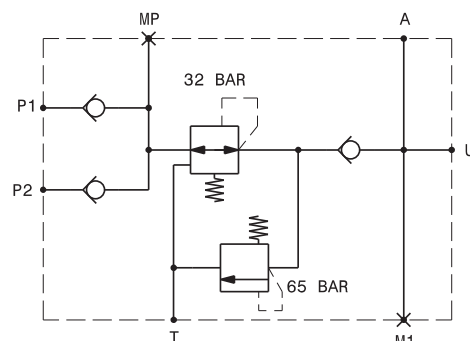


Valvola per la carica degli accumulatori
Valve for charging the accumulators
mod. BM050001


Corpo in Ghisa
Cast Iron Body

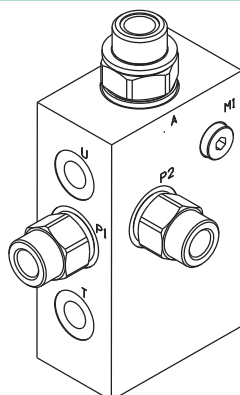

Portata massima <i>Max flow</i>	10 l/min <i>2.6 gpm</i>
Pressione massima <i>Max pressure</i>	350 bar <i>5075 psi</i>
Taratura riduttrice di pressione <i>Reducing pressure valve setting</i>	32 bar <i>464 psi</i>

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperatura di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

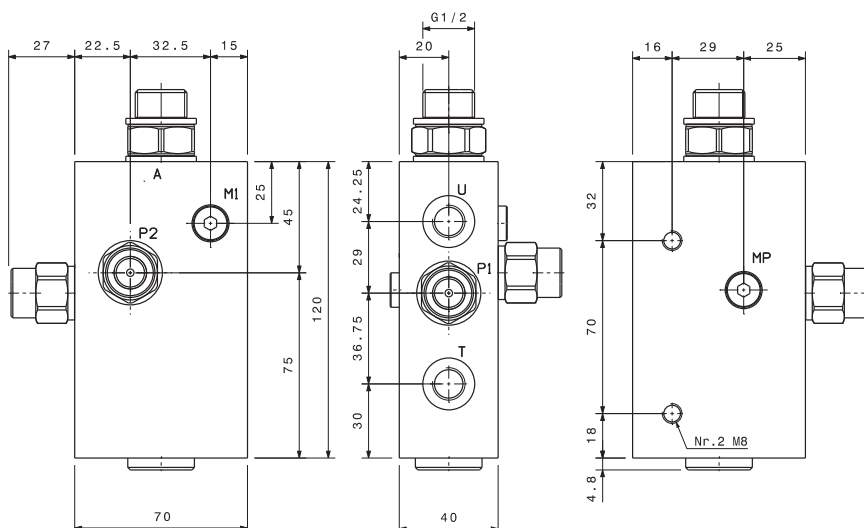

Modello <i>Type</i>	U, P, P1, P2	M1, MP	A
BM050001	1/4" GAS	1/8" GAS	1/2 GAS (for accumulator)

Sigla di ordinazione / Ordering code

BM050001

Modello
Type

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding. CBF reserves the right to introduce modifications without notice.