



Divisore – riunificatore di flusso con funzione antistallo
Flow divider combiner with anti-stall function

mod. DFR-10-AS

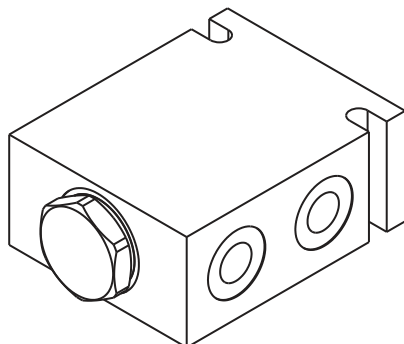

Corpo in alluminio
Aluminium body



Modello Type	Pressione massima Max pressure	Portata massima Max flow	V	C1	C2
DFR-10-14-AS	300 bar 4300 psi	25 l/min 6.6 gpm	1/4" GAS	1/4" GAS	1/4" GAS
DFR-10-38-AS	300 bar 4300 psi	25 l/min 6.6 gpm	3/8" GAS	3/8" GAS	3/8" GAS
DFR-10-12-AS	300 bar 4300 psi	60 l/min 15.8 gpm	1/2" GAS	3/8" GAS	3/8" GAS

Errore max di divisione Flow accuracy of inlet flow	± 3%
--	------


Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

Codice Code	Campo di portata Flow range	DFR-10-14-AS	DFR-10-38-AS	DFR-10-12-AS
01	2 ÷ 4 l/min 0.5 ÷ 1 gpm	●	●	-
02	4 ÷ 7 l/min 1 ÷ 1.8 gpm	●	●	-
03	7 ÷ 12 l/min 1.8 ÷ 3.2 gpm	●	●	-
04	10 ÷ 16 l/min 2.7 ÷ 4.2 gpm	●	●	-
05	15 ÷ 25 l/min 4 ÷ 6.6 gpm	●	●	-
06	25 ÷ 40 l/min 6.6 ÷ 10.5 gpm	-	-	●
07	40 ÷ 60 l/min 10.5 ÷ 15.8 gpm	-	-	●

Sigla di ordinazione / Ordering code

DFR-10-38	02	AS
Modello Type	Campo di portata Flow range 01, 02, 03, 04, 05, 06, 07	-

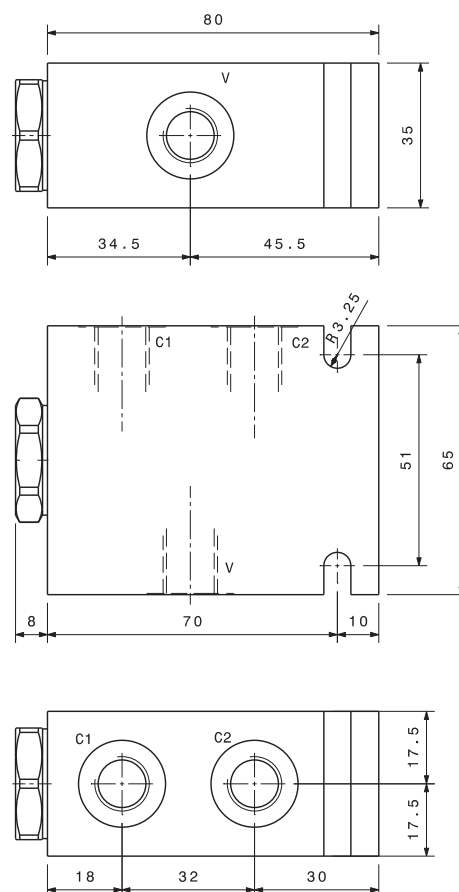

For flow diagram see performance of cartridge

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.