
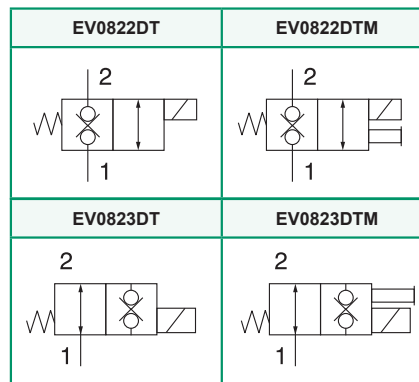


Valvola elettrica direzionale 2/2 a doppia tenuta normalmente chiusa
 2/2 solenoid directional valve, bidirectional blocking



mod. EV-08-2X-DT

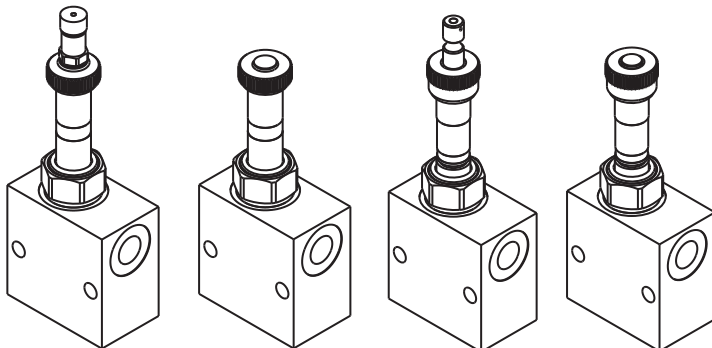

Portata massima Max flow	40 l/min 10.5 gpm	
Pressione massima Max pressure	EV-08-22-DT-**-	250 bar 3600 psi
	EV-08-22-DT-**-Y (Su richiesta) (Upon request)	350 bar 5000 psi

Dati e tarature ottenuti usando olio a 30 cSt a 50°C.
 Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro -20÷+90 °C. Filtrazione assoluta 25 µ.
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt, working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration 25 µ.

Modello Type	Attacchi Ports	H	H1	H2	H3	L
EV0822DT14	G1/4	50	59	12.5	26.5	20
EV0822DT38	G3/8	60	59	15	36.5	18
EV0822DT12	G1/2	60	59	15	36.5	18
EV0822DTM14	G1/4	50	81	12.5	26.5	20
EV0822DTM38	G3/8	60	81	15	36.5	18
EV0822DTM12	G1/2	60	81	15	36.5	18
EV0823DT14	G1/4	50	64	12.5	26.5	20
EV0823DT38	G3/8	60	64	15	36.5	18
EV0823DT12	G1/2	60	64	15	36.5	18
EV0823DTM14	G1/4	50	83	12.5	26.5	20
EV0823DTM38	G3/8	60	83	15	36.5	18
EV0823DTM12	G1/2	60	83	15	36.5	18

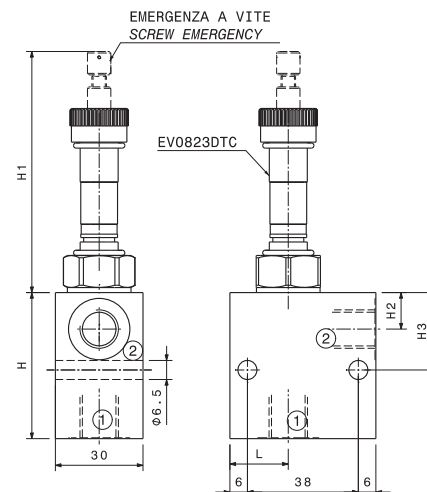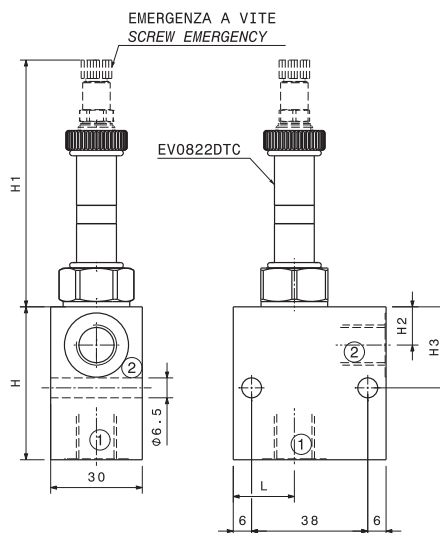


Perdite interne: max. 5 gocce/minuto a 250 bar
 Internal leakage: max. 5 drops/min at 250 bar

**
 M standard emergency screw type
 MT pull (only for normally closed)
 MS push (only for normally open)

**
 Version "Y" NA normally open is available only with MS emergency

Sigla di ordinazione / Ordering code

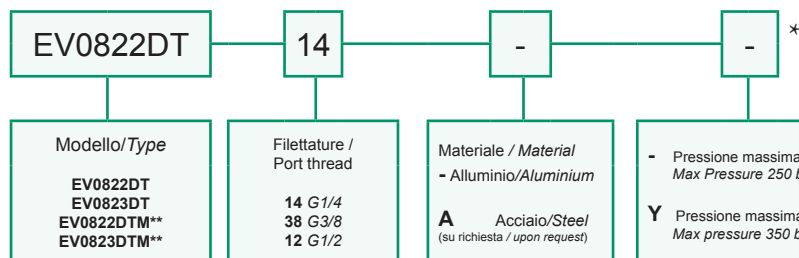

For flow diagram see
 PRESSURE DROP SOLENOID VALVE (7)

* Bobina venduta separatamente mod. S1
 * Coil sold separately mod. S1

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.