

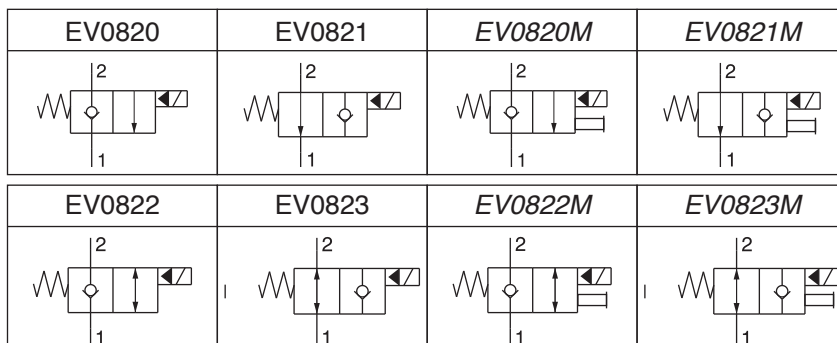


Valvola elettrica direzionale 2/2
 2/2 solenoid directional valve
 mod. EV-08-2X



Portata massima Max flow	40 l/min 10.5 gpm	
Pressione massima Max pressure bar/psi	EV-08-2*-**	250 bar 3600 psi
	EV-08-2*-**-Y (Su richiesta) (Upon request)	350 bar 5000 psi

Modello Type	② ①	H	H1	H2	H3	L
EV0820-14	G1/4	50	59	12.5	26.5	30
EV0820-38	G3/8	60	59	15	36.5	32
EV0820-12	G1/2	60	59	15	36.5	31
EV0821-14	G1/4	50	64	12.5	26.5	30
EV0821-38	G3/8	60	64	15	36.5	32
EV0821-12	G1/2	60	64	15	36.5	31
EV0822-14	G1/4	50	59	12.5	26.5	30
EV0822-38	G3/8	60	59	15	36.5	32
EV0822-12	G1/2	60	59	15	36.5	31
EV0823-14	G1/4	50	64	12.5	26.5	30
EV0823-38	G3/8	60	64	15	36.5	32
EV0823-12	G1/2	60	64	15	36.5	31
EV0820M-14	G1/4	50	81	12.5	26.5	30
EV0820M-38	G3/8	60	81	15	36.5	32
EV0820M-12	G1/2	60	81	15	36.5	31
EV0821M-14	G1/4	50	84	12.5	26.5	30
EV0821M-38	G3/8	60	84	15	36.5	32
EV0821M-12	G1/2	60	84	15	36.5	31
EV0822M-14	G1/4	50	81	12.5	26.5	30
EV0822M-38	G3/8	60	81	15	36.5	32
EV0822M-12	G1/2	60	81	15	36.5	31
EV0823M-14	G1/4	50	84	12.5	26.5	30
EV0823M-38	G3/8	60	84	15	36.5	32
EV0823M-12	G1/2	60	84	15	36.5	31

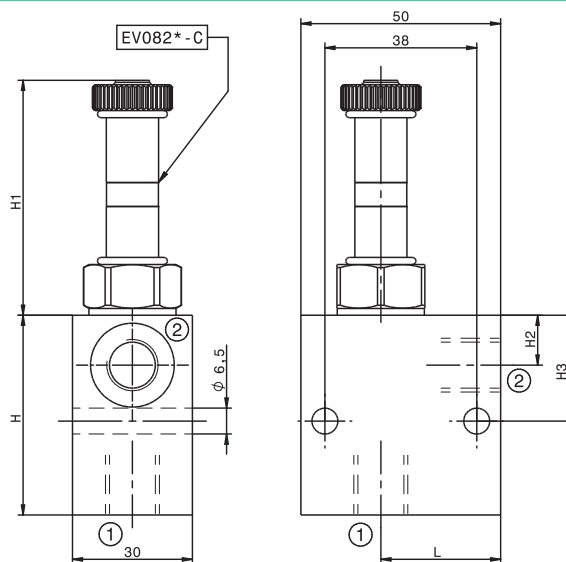


For flow diagram see
 PRESSURE DROP SOLENOID VALVE (1)

Perdite interne: max. 5 gocce/minuto a 250 bar
 Internal leakage: max. 5 drops/min at 250 bar


Emergenze disponibili su richiesta
 Emergency available upon request

Normally closed



In tiro con
 ritorno a molla
 To pull with
 spring return

Normally open



In spinta con
 ritorno a molla
 To push with
 spring return

**
M standard emergency screw type
MT pull (only for normally closed)
MS push (only for normally open)

**
 Version "Y" NA normally open is
 available only with MS emergency

Sigla di ordinazione / Ordering code

EV0820	14	-	- *
Modello / Type	Filettature / Port thread	Materiale / Material	- Pressione massima 250 bar Max Pressure 250 bar
EV0820 EV0821 EV0822 EV0823 EV0820M** EV0821M** EV0822M** EV0823M**	14 G1/4 38 G3/8 12 G1/2	- Alluminio/Aluminium A Acciaio/Steel (su richiesta / upon request)	Y Pressione massima 350 bar Max pressure 350 bar

* Bobina venduta separatamente mod. S1
 * Coil sold separately mod. S1

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.