

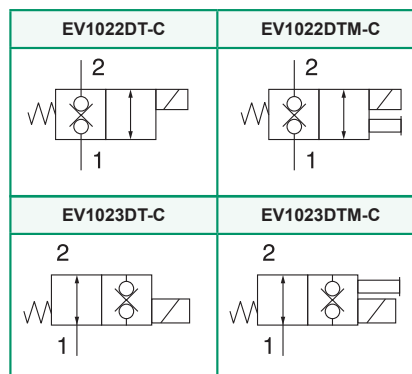
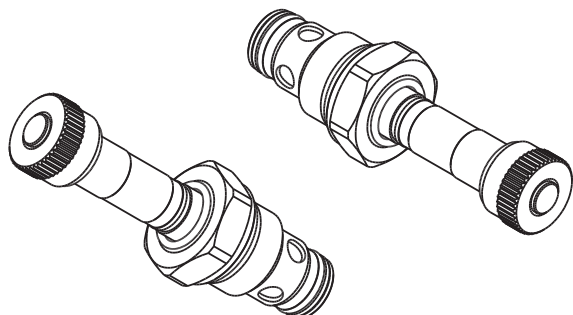


Valvola elettrica direzionale 2/2 a doppia tenuta
2/2 solenoid directional valve, bidirectional blocking

mod. EV-10-2X-DT-C

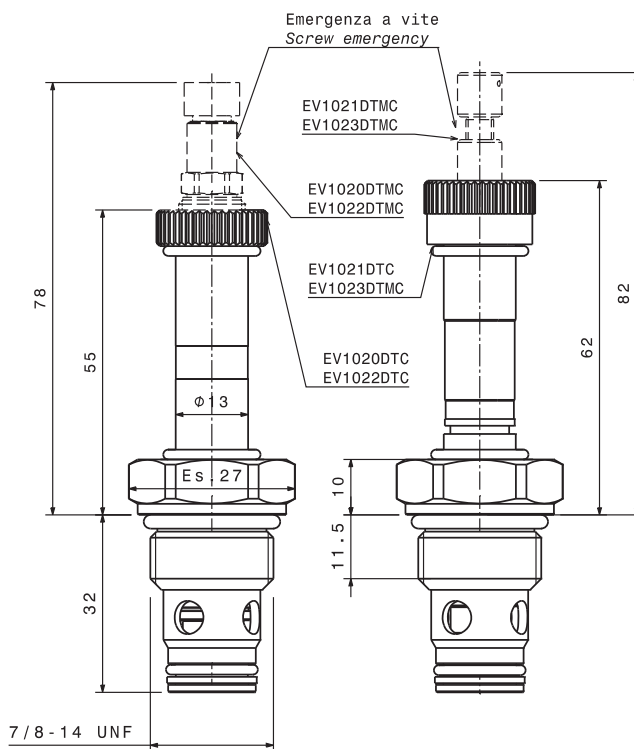

Portata massima <i>Max flow</i>	70 l/min 18.5 gpm	
Pressione massima <i>Max pressure</i>	EV-10-2*-DT-C	250 bar 3600 psi
	EV-10-2*-DT-C-Y (Su richiesta) (Upon request)	350 bar 5000 psi
Coppia di serraggio <i>Installation torque</i>	45 ÷ 50 Nm 33 ÷ 37 lbf ft	
Dati e tarature ottenuti usando olio a 30 cSt a 50°C. Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro -20÷+90 °C. Filtrazione assoluta 25 µ. <i>Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt, working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration 25 µ.</i>		

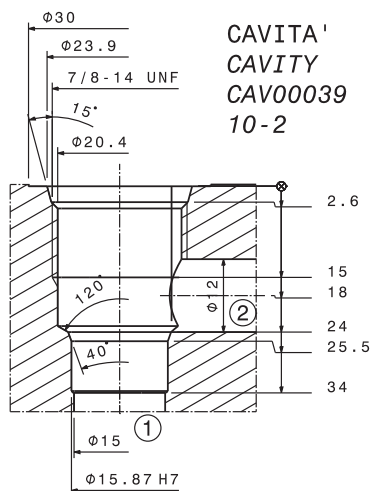

Sigla di ordinazione / Ordering code


EV1022DT	C*	- Pressione massima 250 bar Max Pressure 250 bar Y Pressione massima 350 bar Max pressure 350 bar
Modello/Type		
EV1022DT EV1023DT EV1022DTM** EV1023DTM**		* Bobina venduta separatamente mod. S1 * Coil sold separately mod. S1

**
Version "Y" NA normally open is available only with MS emergency


For flow diagram see
PRESSURE DROP SOLENOID VALVE (3)

Emergenze disponibili su richiesta
Emergency available upon request

Normally closed



Normally open



**
M standard emergency screw type
MT pull (only for normally closed)
MS push (only for normally open)

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.