
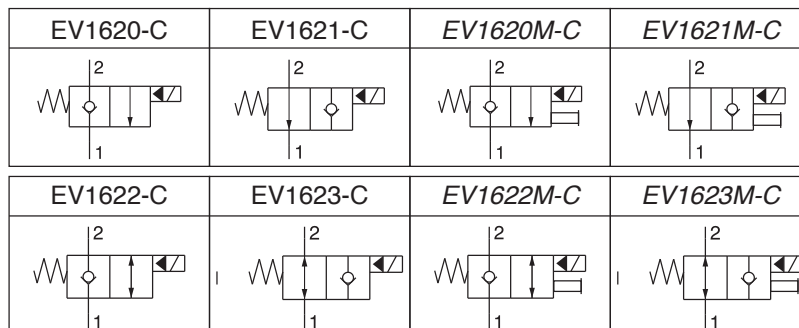




Valvola elettrica direzionale 2/2 a cartuccia
2/2 solenoid directional valve, cartridge type

mod. EV-16-2X-C

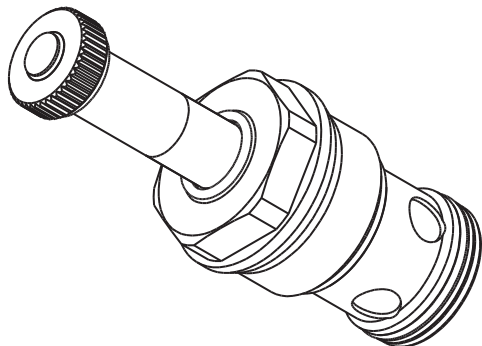

Portata massima Max flow	150 l/min 40 gpm	
Pressione massima Max pressure	EV-16-2X-C	250 bar 3600 psi
	EV-16-2X-C-Y (Su richiesta) (Upon request)	350 bar 5000 psi
Coppia di serraggio Installation torque	180 ÷ 210 Nm 130 ÷ 150 lbf ft	

Dati e tarature ottenuti usando olio a 30 cSt a 50°C.
Viscosità raccomandate 10 ÷ 420 cSt. Temperature di lavoro -20÷+90 °C. Filtrazione assoluta 25 µ.
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C (122 F). Recommended viscosity 10 ÷ 420 cSt, working temperature -20÷+90 °C (-4 F÷194 F). Absolute filtration 25 µ.

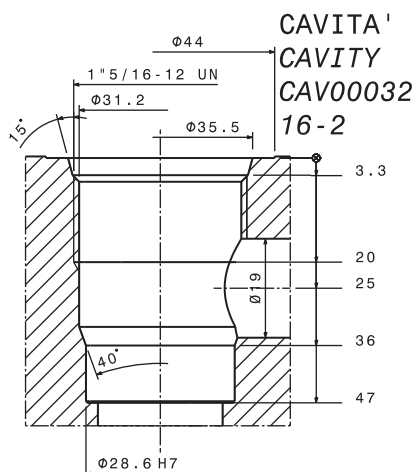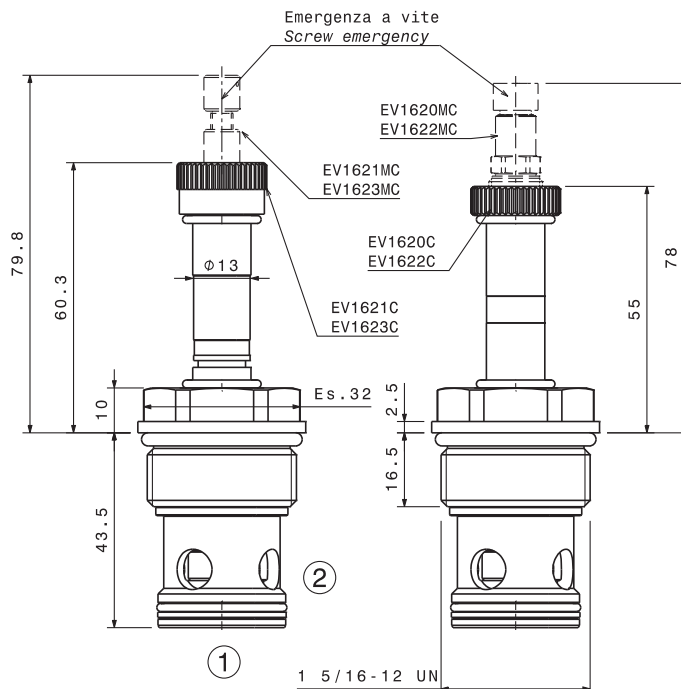

Sigla di ordinazione / Ordering code

EV1620	C*	- Pressione massima 250 bar Max Pressure 250 bar Y Pressione massima 350 bar Max pressure 350 bar
--------	----	--

Modello/Type

EV1620	EV1621
EV1622	EV1623
EV1620M**	EV1621M**
EV1622M**	EV1623M**


* Bobina venduta separatamente mod. S1
* Coil sold separately mod. S1

For flow diagram see
PRESSURE DROP SOLENOID VALVE (5)


Perdite interne: max. 5 gocce/minuto a 250 bar
Internal leakage: max. 5 drops/min at 250 bar

Emergenze disponibili su richiesta
Emergency available upon request

Normally closed



Normally open



**
M standard emergency screw type
MT pull (only for normally closed)
MS push (only for normally open)

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.