

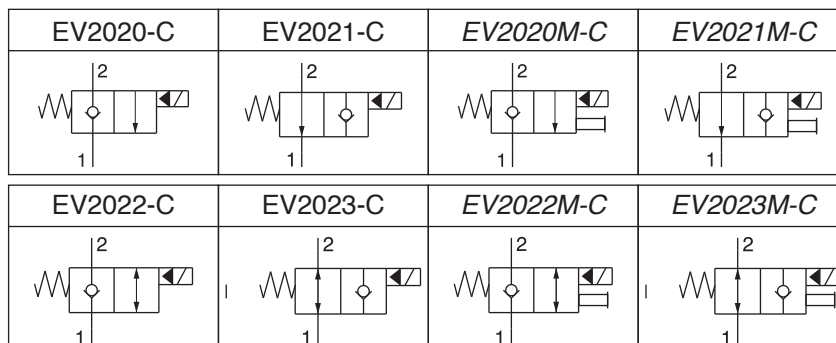


Valvola elettrica direzionale 2/2
 2/2 solenoid directional valve
 mod. EV-20-2X

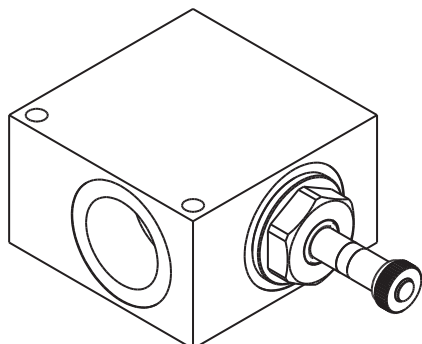

Portata massima Max flow	200 l/min 53 gpm	
Pressione massima Max pressure	EV-20-2*-**	250 bar 3600 psi
	EV-20-2*-**Y (Su richiesta) (Upon request)	350 bar 5000 psi

Modello Type	② ①	H1
EV2020-10 EV2020-114 EV2020-112	G1" G1"-1/4 G1"-1/2	61
EV2021-10 EV2021-114 EV2021-112	G1" G1"-1/4 G1"-1/2	66
EV2022-10 EV2022-114 EV2022-112	G1" G1"-1/4 G1"-1/2	61
EV2023-10 EV2023-114 EV2023-112	G1" G1"-1/4 G1"-1/2	66
EV2020M-10 EV2020M-114 EV2020M-112	G1" G1"-1/4 G1"-1/2	83
EV2021M-10 EV2021M-114 EV2021M-112	G1" G1"-1/4 G1"-1/2	85
EV2022M-10 EV2022M-114 EV2022M-112	G1" G1"-1/4 G1"-1/2	83
EV2023M-10 EV2023M-114 EV2023M-112	G1" G1"-1/4 G1"-1/2	85

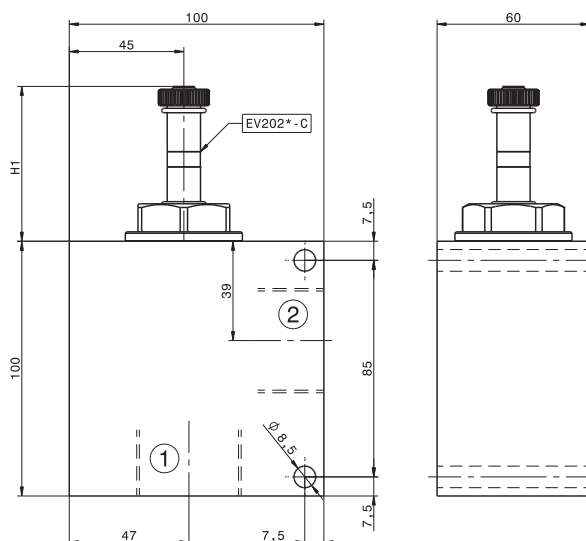


For flow diagram see
 PRESSURE DROP SOLENOID VALVE (6)


Perdite interne: max. 5 gocce/minuto a 250 bar
 Internal leakage: max. 5 drops/min at 250 bar

Emergenze disponibili su richiesta
 Emergency available upon request

Normally closed



Normally open



M standard emergency screw type
MT pull (only for normally closed)
MS push (only for normally open)

 Version "Y" NA normally open is available only with MS emergency

Sigla di ordinazione / Ordering code

EV2020	10	-	*
Modello/Type	Filettature / Port thread	Materiale / Material	- Pressione massima 250 bar Max Pressure 250 bar
EV2020 EV2021 EV2022 EV2023 EV2020M EV2021M EV2022M EV2023M	10 G1 114 G1-1/4 112 G1-1/2	- Alluminio/Aluminium A Acciaio/Steel (su richiesta / upon request)	Y Pressione massima 350 bar Max pressure 350 bar

* Bobina venduta separatamente mod. S1
 * Coil sold separately mod. S1

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, CBF reserves the right to introduce modifications without notice.