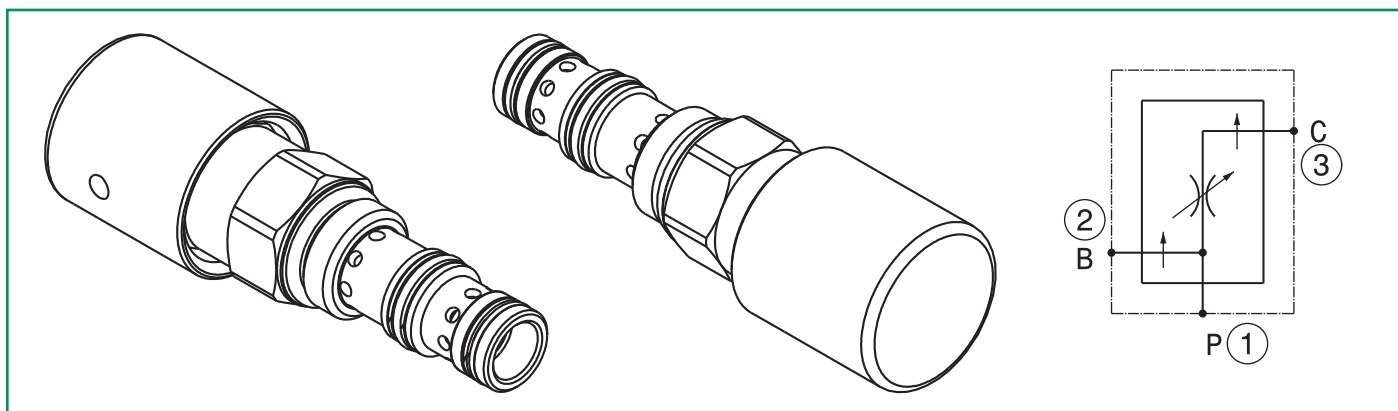


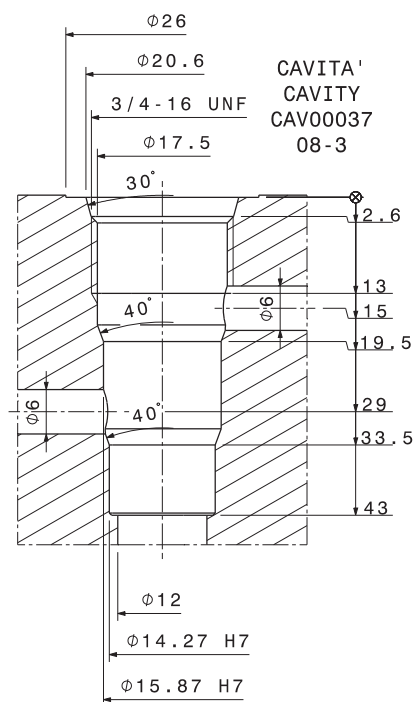
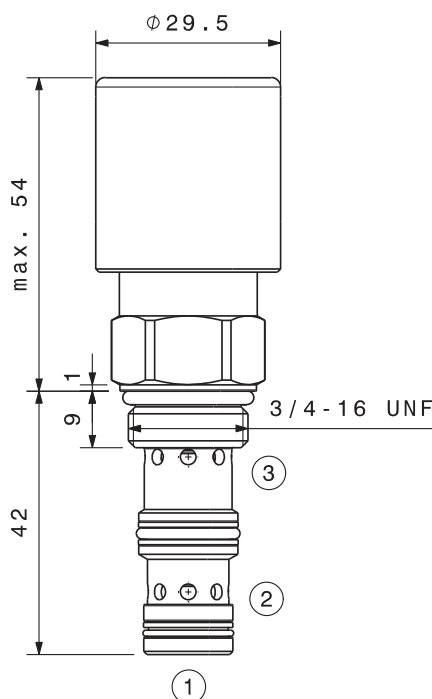
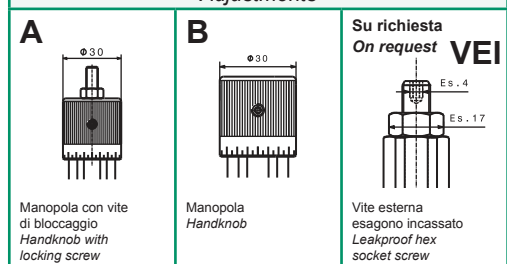
Regolatore di fl usso prioritario a tre vie a cartuccia
Pressure compensated 3 ways fl ow regulator – cartridge type
 mod. **RFP-08-C**



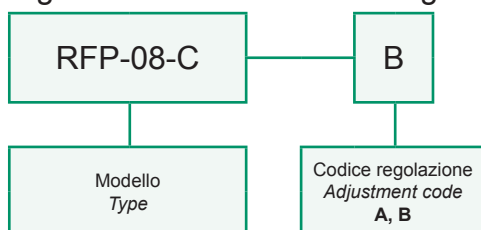
Portata massima <i>Max flow</i>	25 l/min <i>6.6 gpm</i>
Portata regolata <i>Regulated flow</i>	15 l/min <i>3.96 gpm</i>
Pressione massima <i>Max pressure</i>	350 bar <i>5000 psi</i>
Coppia di serraggio <i>Installation torque</i>	27 ÷ 30 Nm <i>20.2 ÷ 22.5 lb ft</i>

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil
with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperature di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

Regolazioni
Adjustments

Sigla di ordinazione / Ordering code



I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding. CBF reserves the right to introduce modifications without notice.