




Valvola di fine corsa in acciaio
End of stroke valve, steel
mod. VFCA (1/4"-3/8"BSP)




Corpo in acciaio
Steel body

Modello Type	A, B	Portata max Max. flow	Pressione max Max. pressure
VFCA-14	1/4" GAS	25 l/min 6.6 gpm	350 bar 5000 psi
VFCA-38	3/8" GAS	40 l/min 10.5 gpm	350 bar 5000 psi


Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

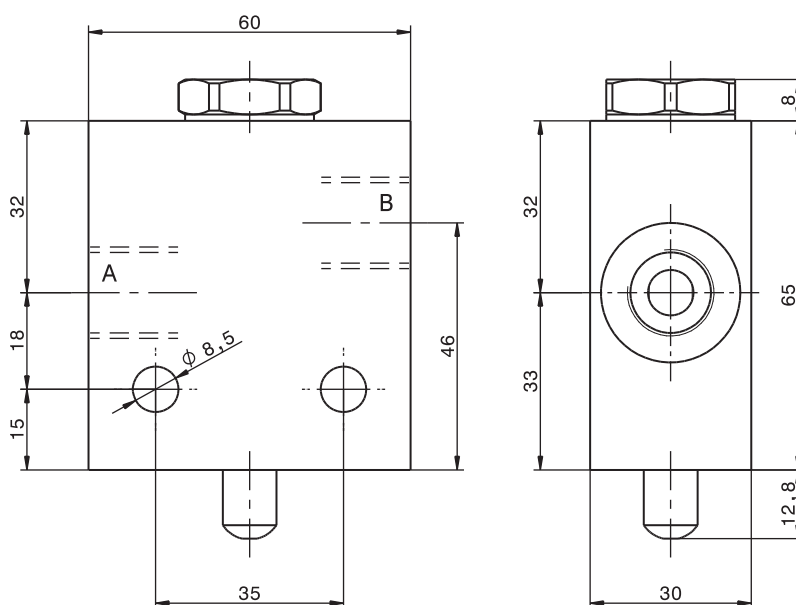

Corsa MAX MAX Stroke	7 mm
---------------------------------	-------------

Sigla di ordinazione / Ordering code

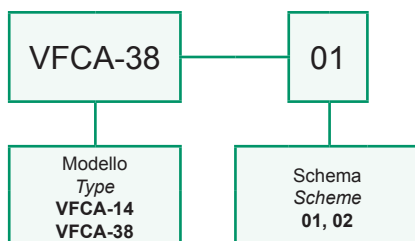

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.