



Valvola di messa a scarico
Unloading valve
 mod. VMS-34

Corpo in alluminio
Aluminium body

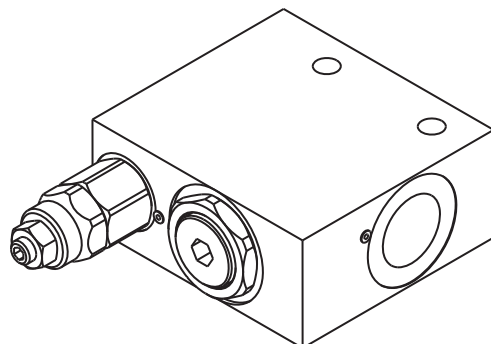


Portata massima <i>Max flow</i>	150 l/min 40 gpm
Pressione massima <i>Max pressure</i>	300 bar 4300 psi
Taratura standard <i>Standard setting</i> (Q=5 l/min)	100 bar 1450 psi
Campo di taratura <i>Adjustment pressure range</i>	10 ÷ 100 bar 145 ÷ 1450 psi


Modello <i>Type</i>	P, T	X
VMS-34	3/4" GAS	1/4" GAS

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperatura di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

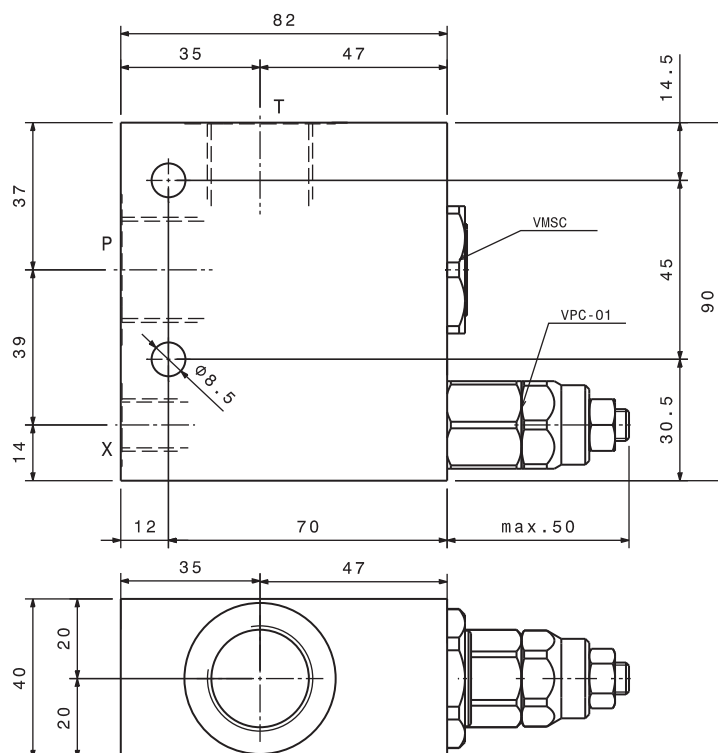

Sigla di ordinazione / Ordering code



I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
 The specifications are not binding, **CBF** reserves the right to introduce modifications without notice.